

touchONE-desk-55

CS0556

Description

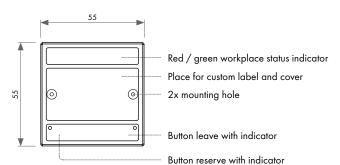

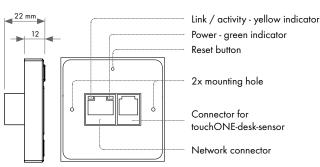

Factory Default Setup

When the Reset button is pressed longer then 5 sec., the factory default function is performed and setup is as follows:

- IP address: from DHCP
- IP Mask: from DHCP
- Password: Empty (no input required)
- All settings are deleted

Box Contents

touchONE-desk-55

Mounting screws for Panconnect

Transparent cover

Quick Start

Declaration of Conformity & Warranty Conditions

Initial Setup

Download the Setup Guide by scanning the QR code



Label Preparation



QR code content text in JSON format:


• {"Email":"desk01@touchone.eu","Name":"Desk 01"}

where


- desk01@touchone.eu is resource e-mail
- Desk 01 is workplace display name


You can download the PDF with labels from the touchONE-concentrator Admin Web pages.

Connection

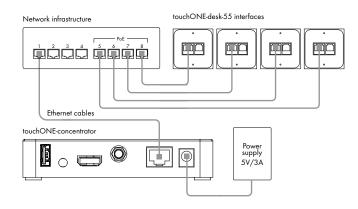


Installation





Use wood screws 2.5x16 mm for direct mounting on the table top.



For mounting using Tabletop Holder 55 (CS0586) or Under Desk Holder 55 (CS0587), use the M2.5x8 screws and nuts supplied with these holders.

Use the M2.5x12 screws provided with this product to mount using the Pan Adapter 55 (CS0584).

www.touchone.eu | support@cuesystem.com