# touchONE-overview

Reservation Overview Player





#### MAIN FEATURES

- Standalone graphic player for reservation overview
- Compatible with MS Office 365, MS Exchange and G Suite
- Plug & Play solution
- Simple setup
- Resolution 1920 x 1080 pixels
- Compliant to HDMI 2.0
- Single cable Ethernet connection
- 802.1X authentication mechanism supported
- Proxy Server support
- Power supply 5 VDC
- Fanless operation
- Small dimension, low profile surface mountable
- Simple installation close to display device

#### DESCRIPTION

touchONE is a meeting room reservation system. The touchONE system touch panels are installed in front of the entrance to the room and show its state. The touchONE-overview unit makes it possible to join a large display that will show the states of several rooms at once, e.g. at receptions.

The display connected to the touchONE-overview unit shows the following information

- Room name and information on occupancy. The state of the room is indicated by green color for a free room, red for an occupied room.
- If the room is free, the display shows the next meeting on the given day (if such a meeting is planned) and the period of time in which it will start
- If the room is occupied, the display shows the subject of the meeting as well as its starting and ending times.
- If the timeline mode is enabled, the display shows a timeline with future meetings for the next few hours.
- It is possible to show up to 14 rooms at once on the display. If more rooms need to be displayed, the list of rooms will scroll.
- Current date, time as well as the number of free and occupied rooms are shown on the display.
- It is also possible to add a company logo to the overview layout.

The player is enclosed in a compact chassis and can be easily integrated to display devices, such as LCD TV or projector at site installation with HDMI display output up to HDMI 2.0.

#### DISPLAY LAYOUTS AND LANGUAGES




Following languages are available for user interface.



Other languages on demand. For conditions contact sales@cuesystem.com.

### APPLICATION DIAGRAM

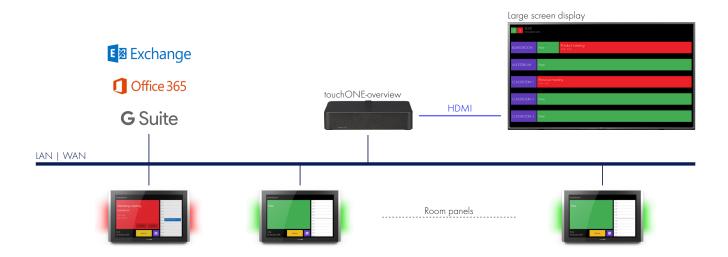

## touchONE-overview





#### **S**PECIFICATIONS

#### CPU

- Rockchip RK3288
- 28 nm Cortex®-A17 quad core 1.8 GHz

#### Memory

- RAM 2GB
- Flash 16 GB

#### Button

- Reset

#### Indicator

- Power LED

#### Firmware

- Room reservation overview
- Admin web for setup

#### Network

- 10/100/1000 BaseT LAN, RJ-45 connector
- 802.1X authentication mechanism supported
- Proxy Server support

#### **BOX CONTENTS**

touchONE-overview unit Mounting accessories Power supply Ethernet cable Quick Start

Declaration of Conformity

#### AV connection

- HDMI 2.0 output, HDMI connector

#### Other connections

- Not supported by application

#### Power supply

- 5 VDC / 3 A
- Power jack connector

#### Physical

- Slim metal enclosure
- Protection IP30
- Dimensions 118 x 101 x 23.6 mm / 4.6'' x 3.9'' x 0.9''
- Weight 0.3 kg / 0.7 lb

#### **Environment conditions**

- Operating temperature 10° to 40° C, ambient with air flow
- Storage temperature 0° to 60° C
- Relative humidity 10% to 90% non-condensing

#### ORDER INFORMATION

### Product code CS0510

The one-time price includes complete unit incl. ready to use reservation overview application, power supply, mounting accessories, future firmware upgrades, two years standard warranty and product support. No annual license fee are required.

#### MECHANICAL DESCRIPTION

