



- **Analog/SIP/GSM telephone**
- **Robust housing, constructed of cold rolled steel with powder coat**
- **Vandal resistant handset and armored cord**
- **Full Rugged & durable keypad, easy to operate**
- **Wall mounting, simple installation**
- **Weather proof protection: from IP54 to IP65**
- **Phone line or 12V DC powered**
- **CE, FCC compliant**

The Handset Telephone is designed to meet the needs of client who experience loss through vandalism. Ideal for parking lots, prisons, railway/metro platforms, hospitals, police stations, ATM machines, stadiums, outside building etc.

Housed in cold rolled steel box and manufactured to a high standard, these telephones offer increased resistance to vandalism, and ensure that the primary function of communications is maintained at all times.

Extremely easy to install. The cable entrance is on the back of the phone to prevent from artificial damage, while the keypad is weather and vandal resistant.

Standard Analogue

As a standard analogue telephone, this unit provides basic telephone functions and can be connected to any standard two-wire telephone line, including analogue PABX lines and PSTN.

SIP-VoIP TECHNICAL SPECIFICATIONS

Adapter Input:

100-240VAC 50~60Hz Output:5V/1A

Port:

WAN: 10/100Base-T RJ-45 for LAN, Auto MDIX

LAN: 10/100Base-T RJ-45 for PC, Auto MDIX

Power Consumption:

Idle:1.5W/ Active:1.8W

Main Chip: Broadcom

GSM/3G TECHNICAL SPECIFICATIONS

Standard SIM card

Programming by SMS

Working Frequency Range:

GSM: GSM850/900/1800/1900MHz

3G:WCDMA850/1900/2100MHz

GSM850/900/1800/1900MHz

Adapter Input:

7.4 V-12V DC

Power Consumption:

Idle current: 75mA

Off hook current: 160mA

TECHNICAL SPECIFICATIONS

Casing Material

Cold rolled steel body

Colors: RED, YELLOW, GREY

Handset Material

ABS material handset with stainless steel spiral cord.

Keypad

Weather sealed tactile digital keypad. chrome key and frame made of zinc alloy. vandal resistance.

Temperature

Operating: -30°C to +65°C

Storing: -40°C to +75°C

Weather Resistance

from IP54 to IP65

Ringling Tone

Shrill warble tone 80 dBA @ 1 metre typical

Hook switch

Electronic / magnetic with no visible moving parts


M.T.B.F.

Calculated to have an M.T.B.F. in excess of 40,000 hours using

Weight

Up to 4 kg depending on option

DIMENSIONS:

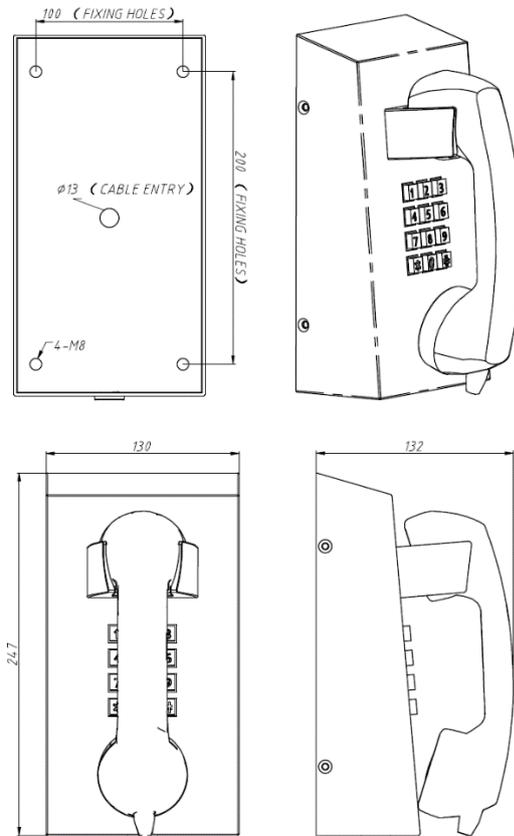

(Measured in mm)

APPROVALS



This mark indicates compliance with the:
Radio & Telecommunications Terminal Equipment
Directive
2004/108/EC



This mark indicates compliance with the:
FCC Part 15 Subpart B Class B

PACKAGE

unit size: 247 *130 *132(mm)

Carton size:340 *235 *165(mm)

Packaging materials: pearl cotton, carton

Gross weight: 3.5KGNet weight: 2.7KG